


## SPECIFICATIONS

MODEL		GTA5080CNC	GTE5080CNC	GTS5080CNC
Cutting Capacity (in)	0°	<input type="checkbox"/>	31 1/2 × 15 3/4	29 1/2 × 15 3/4
		<input type="checkbox"/>	19 5/8	
	45°	<input type="checkbox"/>	15 3/4 × 15 3/4	15 3/4
		<input type="checkbox"/>	—	
Blade Size (in)		Thickness 0.5	Width 1 1/2	Length 22'6
Blade Speed (ft/min)		33~387		
Work Feed	Outfeeding side (in)	Shuttle Vise (Stroke 19 5/8)		
	Infeeding side (in)	Pinch Roller	—	Shuttle Vise (Stroke 78 3/4)
Motor Output (HP)	Saw Blade	7.5		
	Hydraulic	3		
	Work Feed	2	—	3
	Others	0.19		
Power Consumption (A)		44(208V)	37(208V)	47(208V)
Machine Weight (lbs)		15,400	13,200	21,200
Standard Accessories		Saw Blade 2pc. Tool 1set		


● Specifications are subject to change without notice.

## OVERALL DIMENSIONS (in)

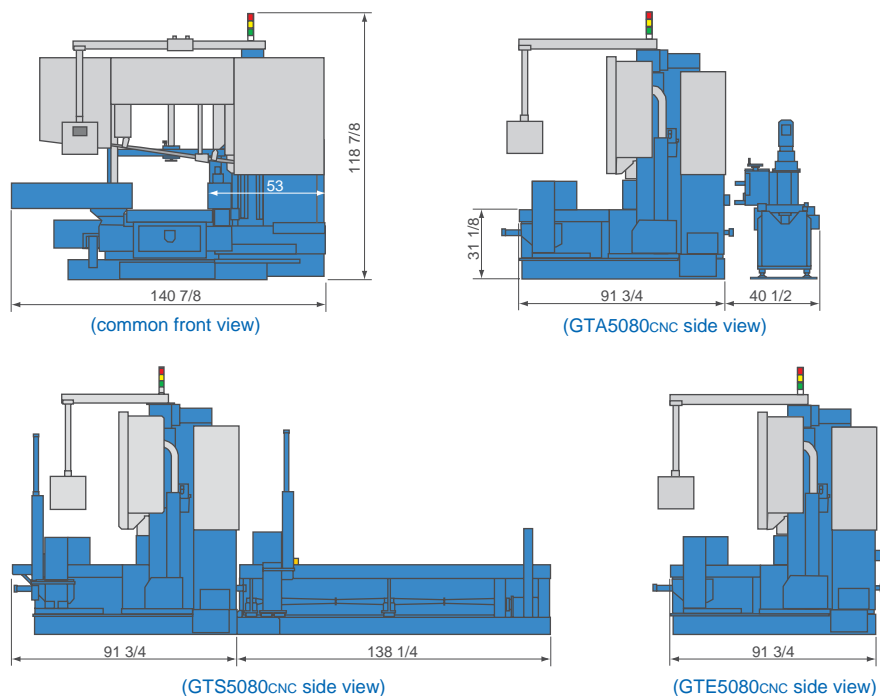

## OPTION

### LASER MARKER

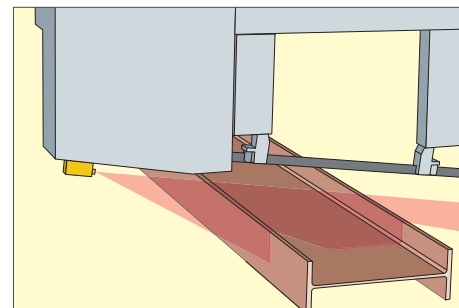

The cutting position can be easily checked even when the saw blade away from the material.

### ROLLER TABLE (Light duty)



### ROLLER TABLE (Heavy duty)



# BAND SAWING MACHINE

for structural steel

GTA5080CNC  
GTS5080CNC  
GTE5080CNC



## NC INDEXING + MITER CUT



**CAPACITY:**  
I BEAM UP TO 28"  
SQUARE COLUMN UP TO 19 5/8"



**DAITO U.S.A., INC.**

1470 Elmhurst Road, Elk Grove Village, IL 60007

TEL 847-437-6788 FAX 847-437-6789

<http://www.daitousa.com>

